


VESSEL: _____

DATE: _____


Details of Training: Gas Meter Operation, Calibration and Bump Test

PS200 Series

Quick Operation Guide / Prise en main rapide




Switch On / Mise en marche

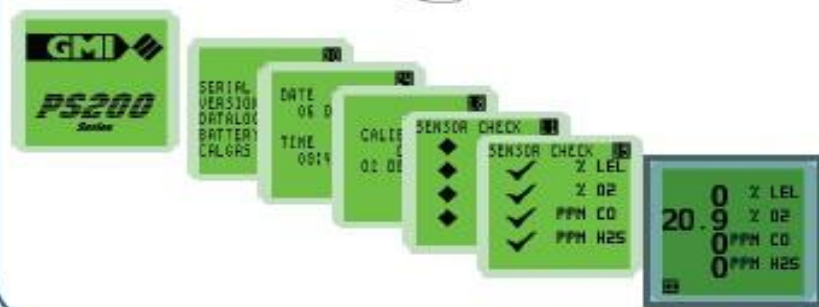


Backlight On / Rétro-éclairage de l'écran

Max

Min

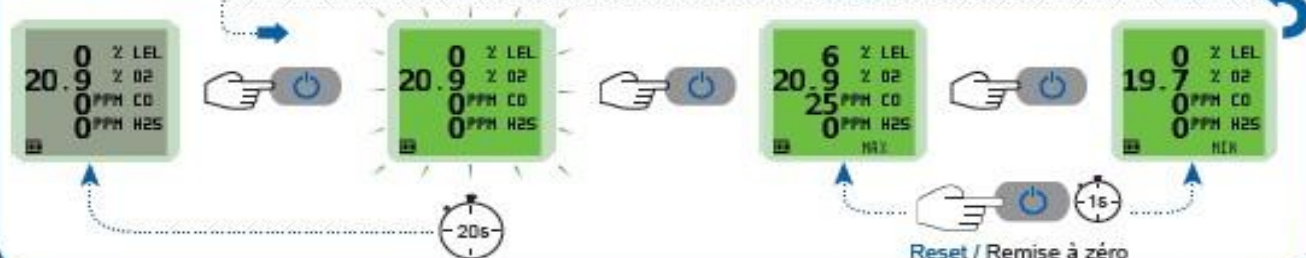


Manual Datalog / Sauvegarde manuelle



Pump / M/A pompe




Self Test / Auto Test



Alarms / Alarmes gaz




Alarm Acknowledge / Acquiescement

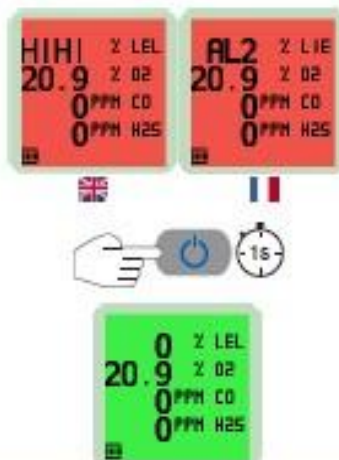

Calibration Overdue / Date de calibrage dépassée



Switch Off / Mise à l'arrêt

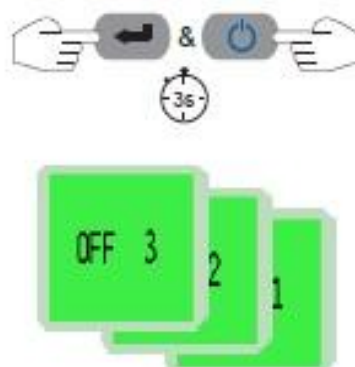


Flow Fault / Défaut débit



Charging / Mise en charge



Zero Fault / Défaut de la mise à zéro



PS200 Series Auto Bump & Calibration

1



2



3




4



5



6




7



8

After the step 7, please follow the steps below to print the certificate –

1. Insert the USB stick into the calibration station, wait for 10 seconds till only 1 green LED light is shown
2. Take out the USB from the station and put it into the PC
3. Open the file in the USB stick and click on "PS200 Settings"
4. Click "View Test / Calibration Certificate"
5. For "Customer Name" – Put in vessel name
6. For "Customer Detail 1" – Put in company name
7. For "Calibrated By" – Put in the name of the person who does the calibration
8. You can leave all other fields blank
9. Click "Create Certificate"
10. Choose the relevant Test Result file and click Open
11. The calibration certificate is now generated. Print out the certificate and sign

	<p>HEALTH, SAFETY, ENVIRONMENT AND QUALITY MANAGEMENT SYSTEM</p> <p>51.0 GAS METER OPERATION, CALIBRATION AND BUMP TEST</p> <p>ON THE JOB TRAINING</p>	<p>OJT : 051 Page 4 of 4 Date : 07-Nov-25 Rev : 10.1 Appr : DPA</p>
--	---	---

Calibration test:

- Put the USB stick into the PC
- Open the file in the USB stick and click on “PS200 Settings”
- Select “Calibration” instead of “Bump test”. These settings are at the top of the box
- Click on generate test settings file and click “OK” when the next screen pop up
- Insert USB stick back into the USB station, and wait 30 seconds until the lights finish their cycle.
- When you see only one LED light, please remove the USB stick from the station
- Follow the steps in the attached pictorial guide – step 1 to step 8

Reference: Maker manual

The above has been read and understood :

CO: _____

2O: _____

3O: _____

JNO _____

CEO _____

2EO _____

3EO _____

4EO _____

Verified by: Master _____

Feedback: